


RESCUE BOAT RIBO 420 P SLING

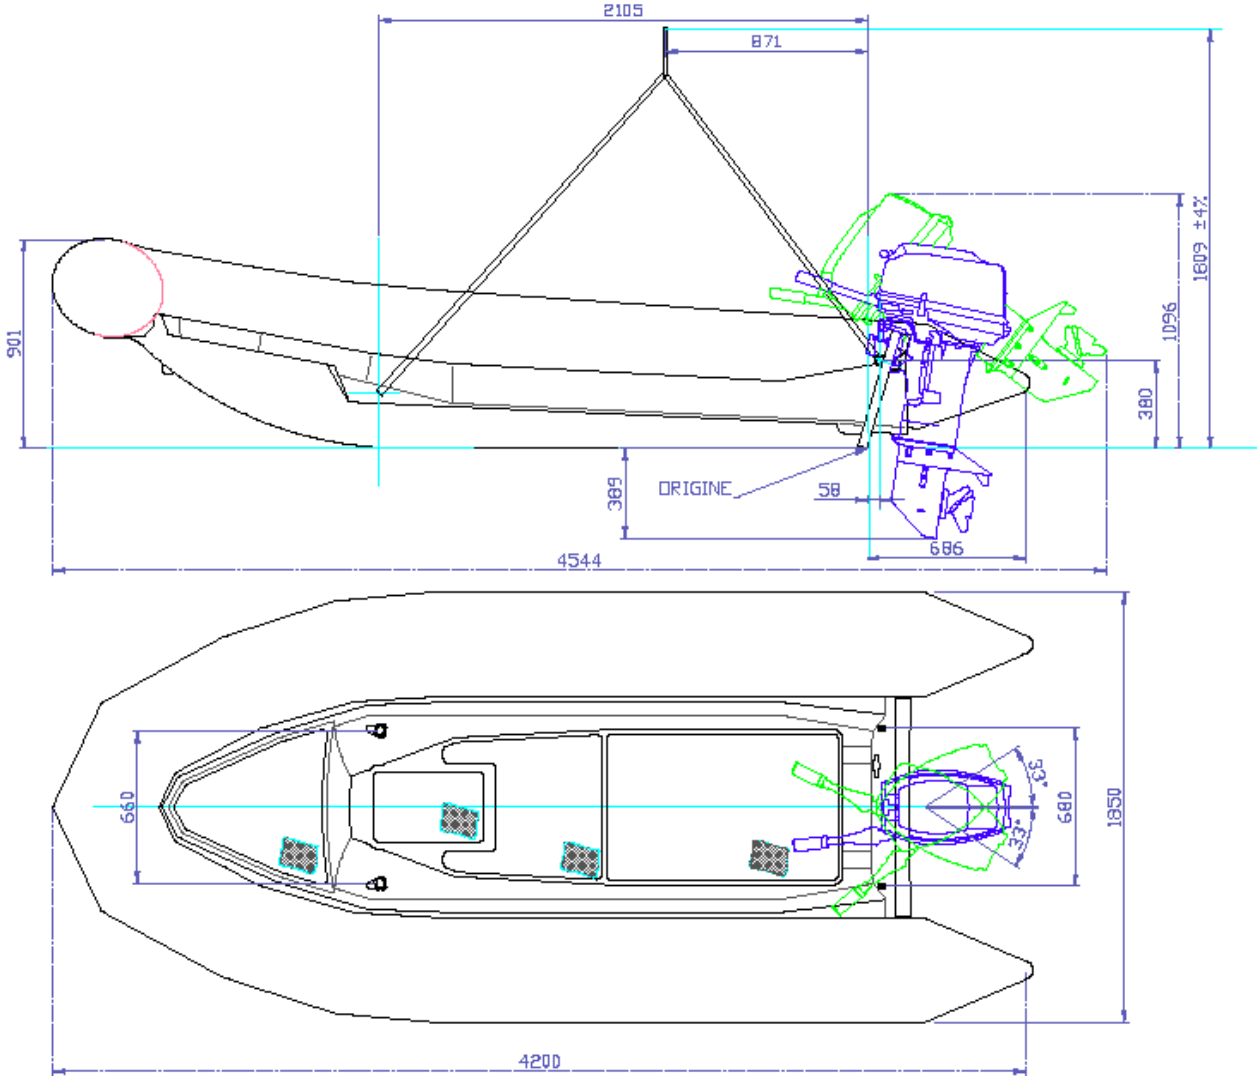

Overall dimensions with lifting sling

RIBO 420 Neo 07042011 KLT.doc

Issue: 5

Date: 07/04/2011


Dimensions and weight +/- 5%
SURVITEC SAS reserves the right to change specification without notice.
For installation, add minimum +10mm for clearance to dimensions of the container.

CAPACITY				
Number of persons: 6			Buoyancy volume: 1230 l / 43.5 cft	
DIMENSIONS				
Length		Width		Buoyancy diameter
Overall	Inside	Overall	Inside	
4.20 m / 13'9"	2.98 m / 9'9"	1.85 m / 6'1"	0.95 m / 3'1"	
SAFETY / INFLATION				
. 5 airtight compartments		. 5 inflation valves		. 5 overpressure valves
WEIGHT				
With equipment & batteries		With equipment, engine (40 CV) & fuel		Operational weight with passengers (40 CV)
245 kg / 540 lbs		360 kg / 793 lbs		855 kg / 1885 lbs
ENGINE				
Shaft length		Engine power		Fuel tanks
long		25 CV 19 kw	40 CV 29.4 kw	2 x 25 l 2 x 6.6 l USCG
TOWING				
. 2 bow towing rings on hull		. 1 bow towing V with on load release shackle		
. 2 towing points on transom		. 1 aft towing V with snap hook		
HOISTING				
. 2 bow lifting points		. 2 aft lifting points on transom		. 1 lifting sling
OPTIONS				
<ul style="list-style-type: none"> . Engine: Tohatsu M25C3 L SOLAS - Maximum towing force: 210 daN <li style="padding-left: 20px;">Tohatsu M40C L SOLAS - Maximum towing force: 168 daN <li style="padding-left: 20px;">Yamaha 25NM HOL SOLAS - Maximum towing force: 210 daN <li style="padding-left: 20px;">Yamaha 40VM HOL SOLAS - Maximum towing force: 168 daN . Propeller pitch: 25 HP engine - 3 x 252 x 332 <li style="padding-left: 20px;">40 HP engine - 3 x 268 x 287 . Overall cover . Release hook: SWL ≥ 850 kg 				

RIBO 420 Neo 07042011 KLT.doc	Issue: 5	Date: 07/04/2011
-------------------------------	----------	------------------

Dimensions and weight +/- 5%
 SURVITEC SAS reserves the right to change specification without notice.
 For installation, add minimum +10mm for clearance to dimensions of the container.

FABRIC	
<ul style="list-style-type: none"> . NEOPRENE fabric . Reflective tapes 	<ul style="list-style-type: none"> . Removable buoyancy . Peripheral rubbing strake
HULL	
<ul style="list-style-type: none"> . GRP composite rigid orange hull . 1 hull drain 	
TRANSOM	
<ul style="list-style-type: none"> . 1 self bailer . Engine aluminium mounting plate + wooden plate 	
HANDLING	
<ul style="list-style-type: none"> . 2 inside lifelines . 2 outside lifelines 	
SEATING	
<ul style="list-style-type: none"> . 2 fixed benches . 1 tiltable bench 	
EQUIPMENT FIXED TO THE RESCUE BOAT	
<ul style="list-style-type: none"> . 50m line . Boat hook . Removable bow cover . Righting lines (2) . Flashing light . Rescue quoits (2) . SOLAS radar reflector . Boarding ladder 	
OTHER EQUIPMENT	
<ul style="list-style-type: none"> . Compass . Sponge (2) . First aid kit . Paddles . SOLAS search light . Whistle . Sea anchor . Floating knife . Electrical torch . Bailer . Repair kit . Fire extinguisher . Torch spare bulb & batteries . Thermal protective aid (2) . Pump . Manual . Equipment bag 	

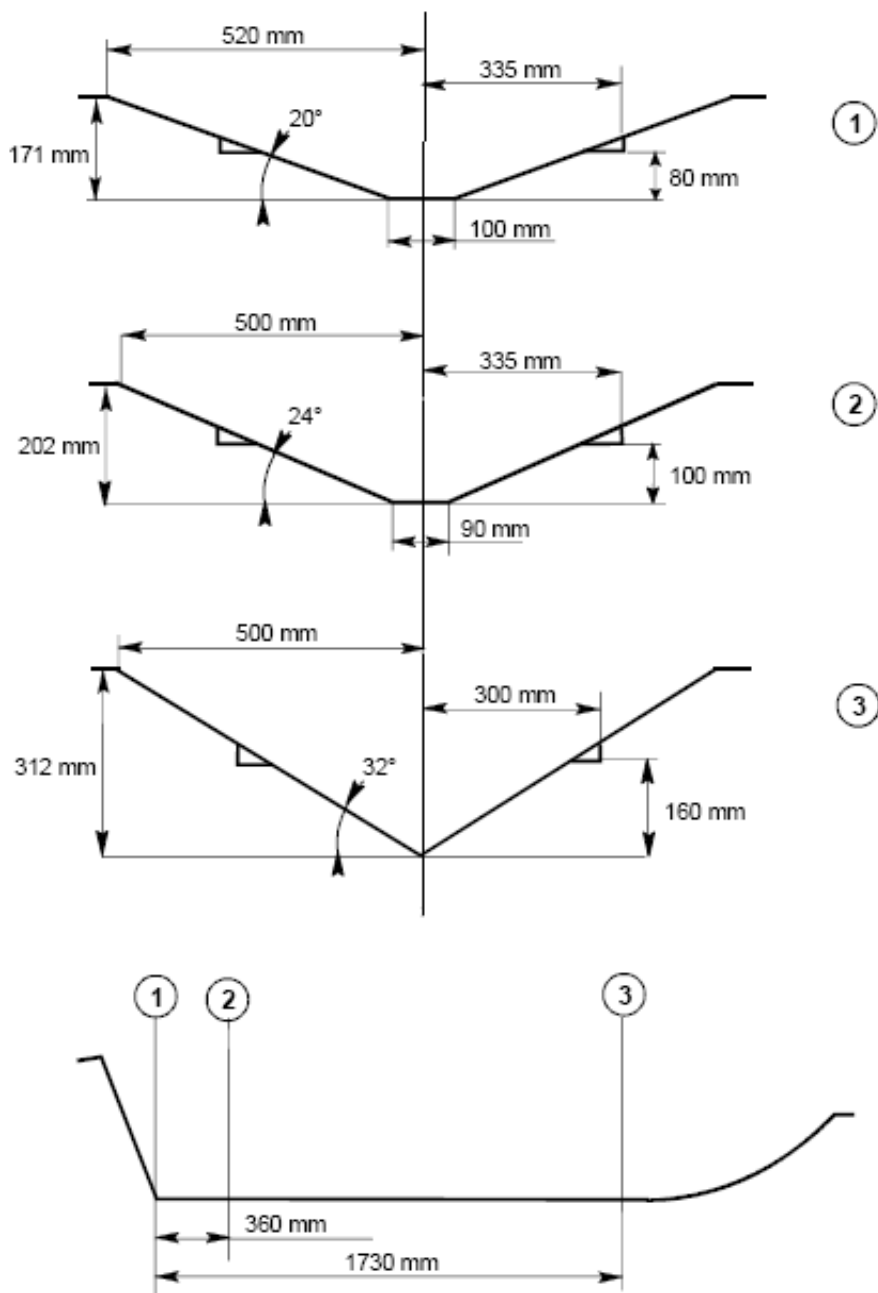

Hull profile

Approvals:	EC – TC – CRS
-------------------	----------------------

RIBO 420 Neo 07042011 KLT.doc	Issue: 5	Date: 07/04/2011
-------------------------------	----------	------------------

Dimensions and weight +/- 5%
 SURVITEC SAS reserves the right to change specification without notice.
 For installation, add minimum +10mm for clearance to dimensions of the container.